


Fasten Furring
Into Aligned Stud
Or Horizontal
Blocking. Spacing
Per Engineering,
2'-0" O.C. MAX



D Section - NorthClad EF - Base Condition
DET REFERENCE: NorthClad EF System

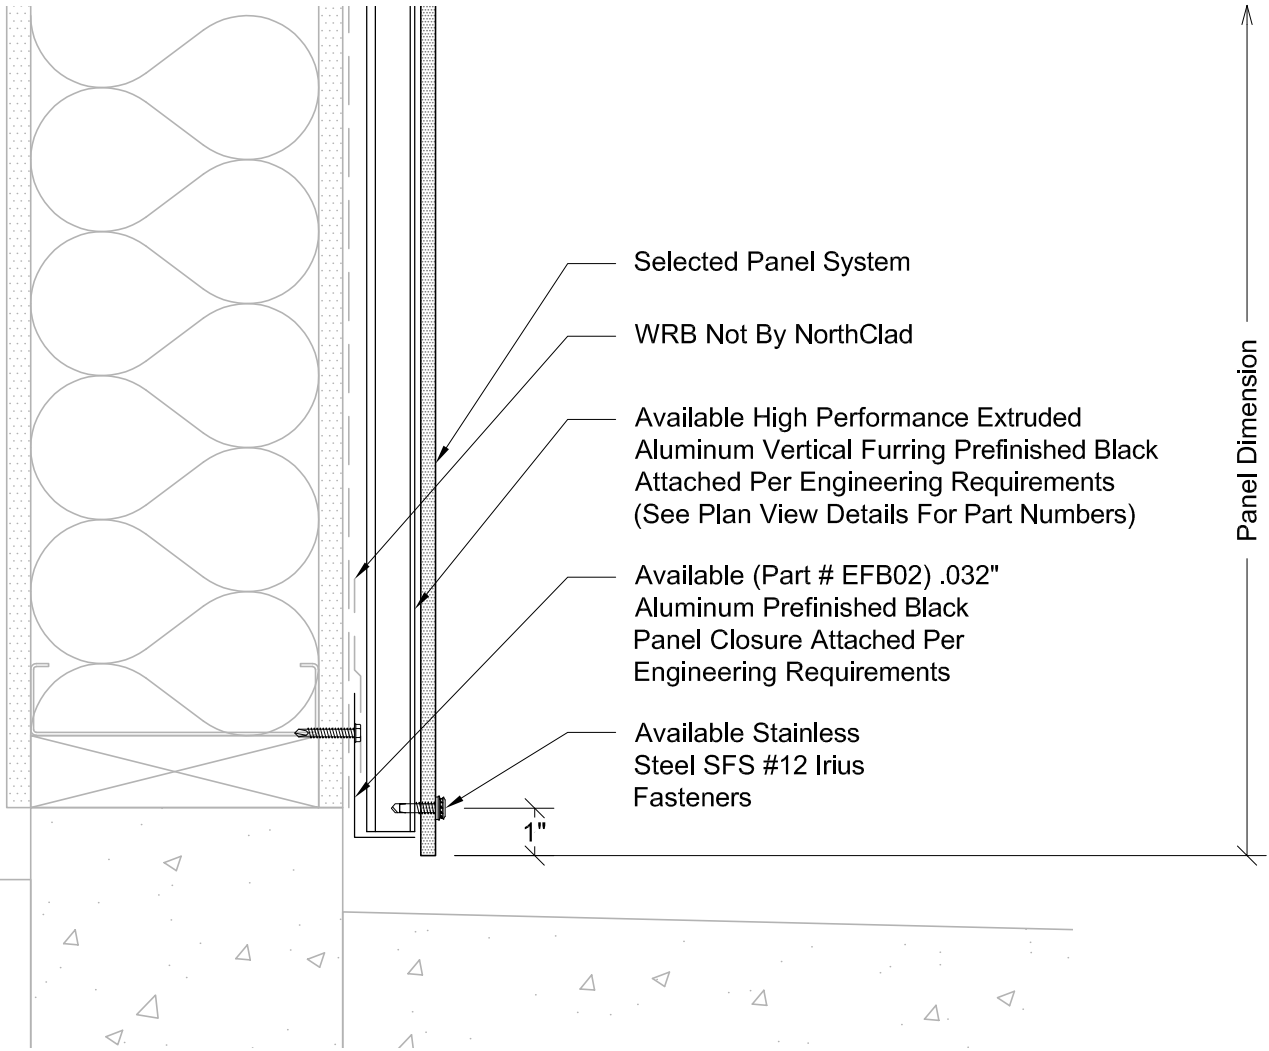

11831 BEVERLY PARK RD. BUILDING C, EVERETT, WA 98204
 * PHONE: 425.740.3702 * FAX: 425.485.3503 *
 www.northclad.com

This document is property of NorthClad and should not be used, duplicated or modified without the express written consent. Copyright © 2010 NorthClad All Rights Reserved

NO.	DESCRIPTION	DATE	INIT.
1	For Submittal	1.5.2015	INT
2			
3			
4			
5			
6			
7			
8			
9			
10			

Project **EF System**

Scale **3" = 1'-0"**

Job Number

Sheet **05-DET**

APPROVED