


Fasten Furring Into Aligned Stud Or Horizontal Blocking. Spacing Per Engineering, 16" O.C. MAX

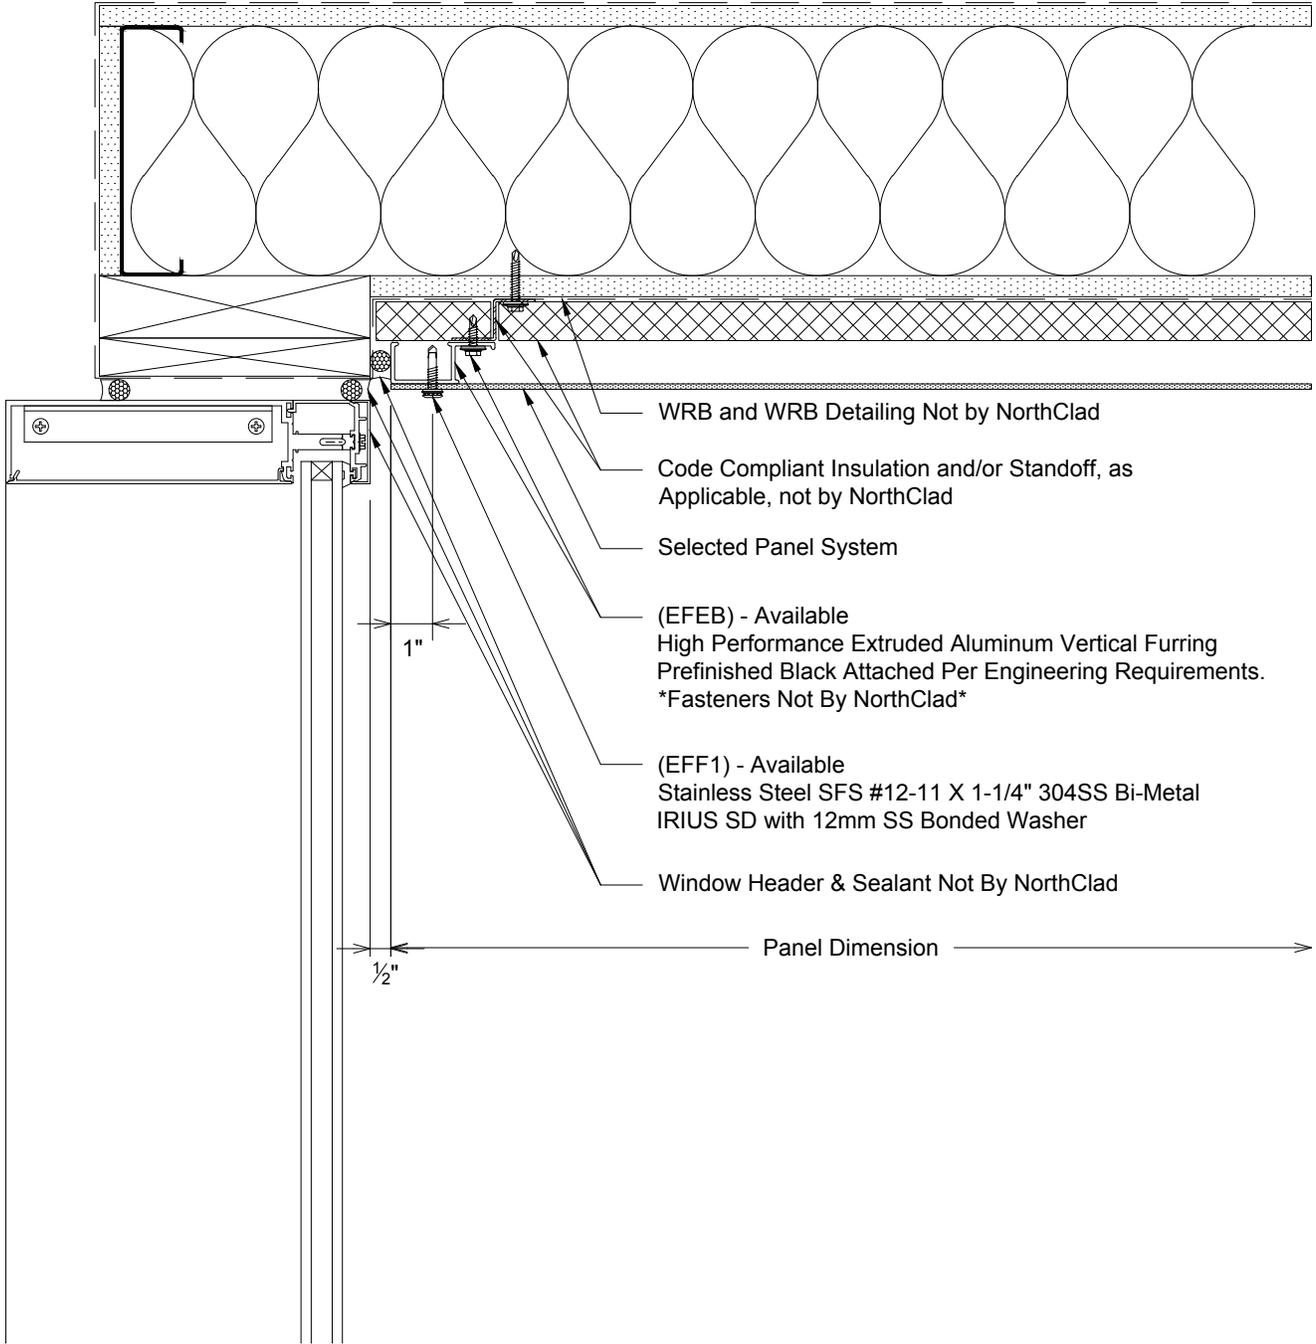

WRB and WRB Detailing Not by NorthClad

Code Compliant Insulation and/or Standoff, as Applicable, not by NorthClad

Selected Panel System

(EFEB) - Available
High Performance Extruded Aluminum Vertical Furring
Prefinished Black Attached Per Engineering Requirements.
Fasteners Not By NorthClad


(EFF1) - Available
Stainless Steel SFS #12-11 X 1-1/4" 304SS Bi-Metal
IRIUS SD with 12mm SS Bonded Washer

Window Header & Sealant Not By NorthClad

Panel Dimension

1"

1/2"



Section - NorthClad EF - Soffit to Window Header

System: NorthClad EF System